

ATTACH RAIL TO  
TUBULAR BACKUP  
WITH 3/4" BOLT  
AND LOCK WASHER

FIRST RAIL POST  
OFF BRIDGE

5'-9"

DEFLECTION  
POINT

6'-3"

1'-0"

6'-3"

HAND RAIL  
L6X3 1/2 x 5/16  
DEEP BEAM RAIL

TOP RAIL SPLICE @  
MIN. 10' RAIL LENGTHS

WORK POINT

ABUTMENT

TYPE "1" POSTS, LENGTH TO BE DETERMINED (TYP)  
PRIMARY STRUCTURAL MEMBER

## ELEVATION OF HANDRAIL TERMINATION DETAIL

N.T.S.

THIS DRAWING IS TO BE USED IN CONJUNCTION WITH ODOT STANDARD DRAWING DBR-2-73




LAKE COUNTY ENGINEER'S OFFICE

BRIDGE HANDRAIL  
STANDARD DRAWING  
HR - 1


DESIGNED: K.D.D. DRAWN: E.M.F. REVIEWED: A.L.E. 4/29/14  
REVISED:

1  
2

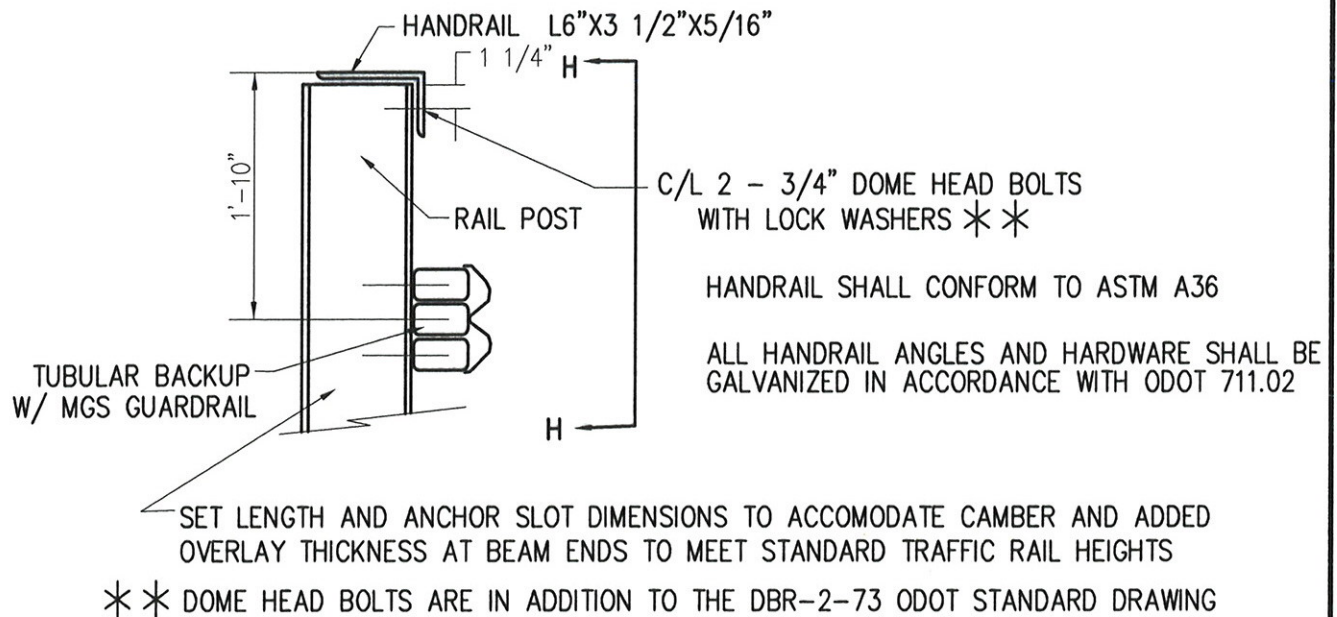

## SECTION G-G

N.T.S.

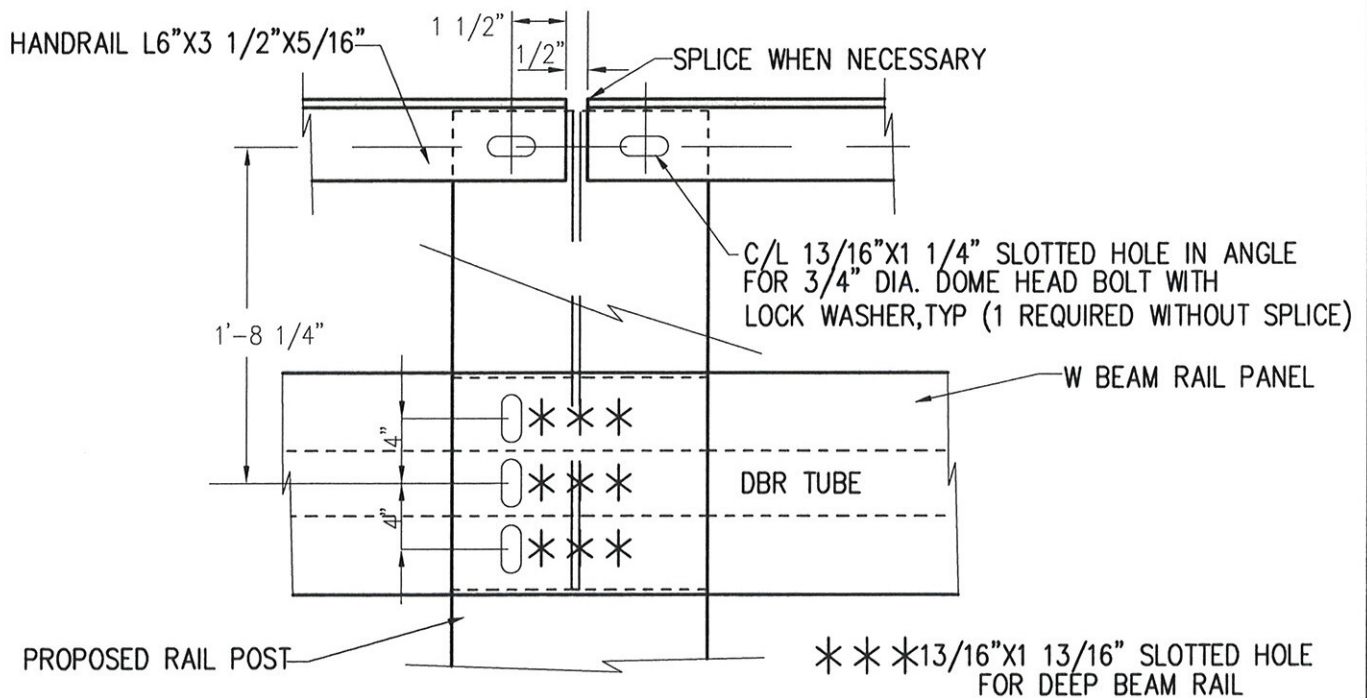

## VIEW H-H

N.T.S.



LAKE COUNTY ENGINEER'S OFFICE

BRIDGE HANDRAIL  
STANDARD DRAWING  
HR - 1

DESIGNED: K.D.D. DRAWN: E.M.F. REVIEWED: A.L.E. 4/29/14  
REVISED:

2  
2